

# BABYMAG LUNG VENTILATOR

## THE COMPLETE SOLUTION TO NEONATE ROOM

### BABYMAG

Monitoring of the main ventilatory parameters, like tidal volume.




**MAGNAMED REMOTE ASSISTANCE (ARM) TECHNOLOGY MAKES DIFFERENCE**

Registration MS: 80659160003

NBR IEC 60601-1-2:2006; NBR IEC 60601-1:1997;  
NBR IEC 60601-2-12:2004

Degree of protection IPX1

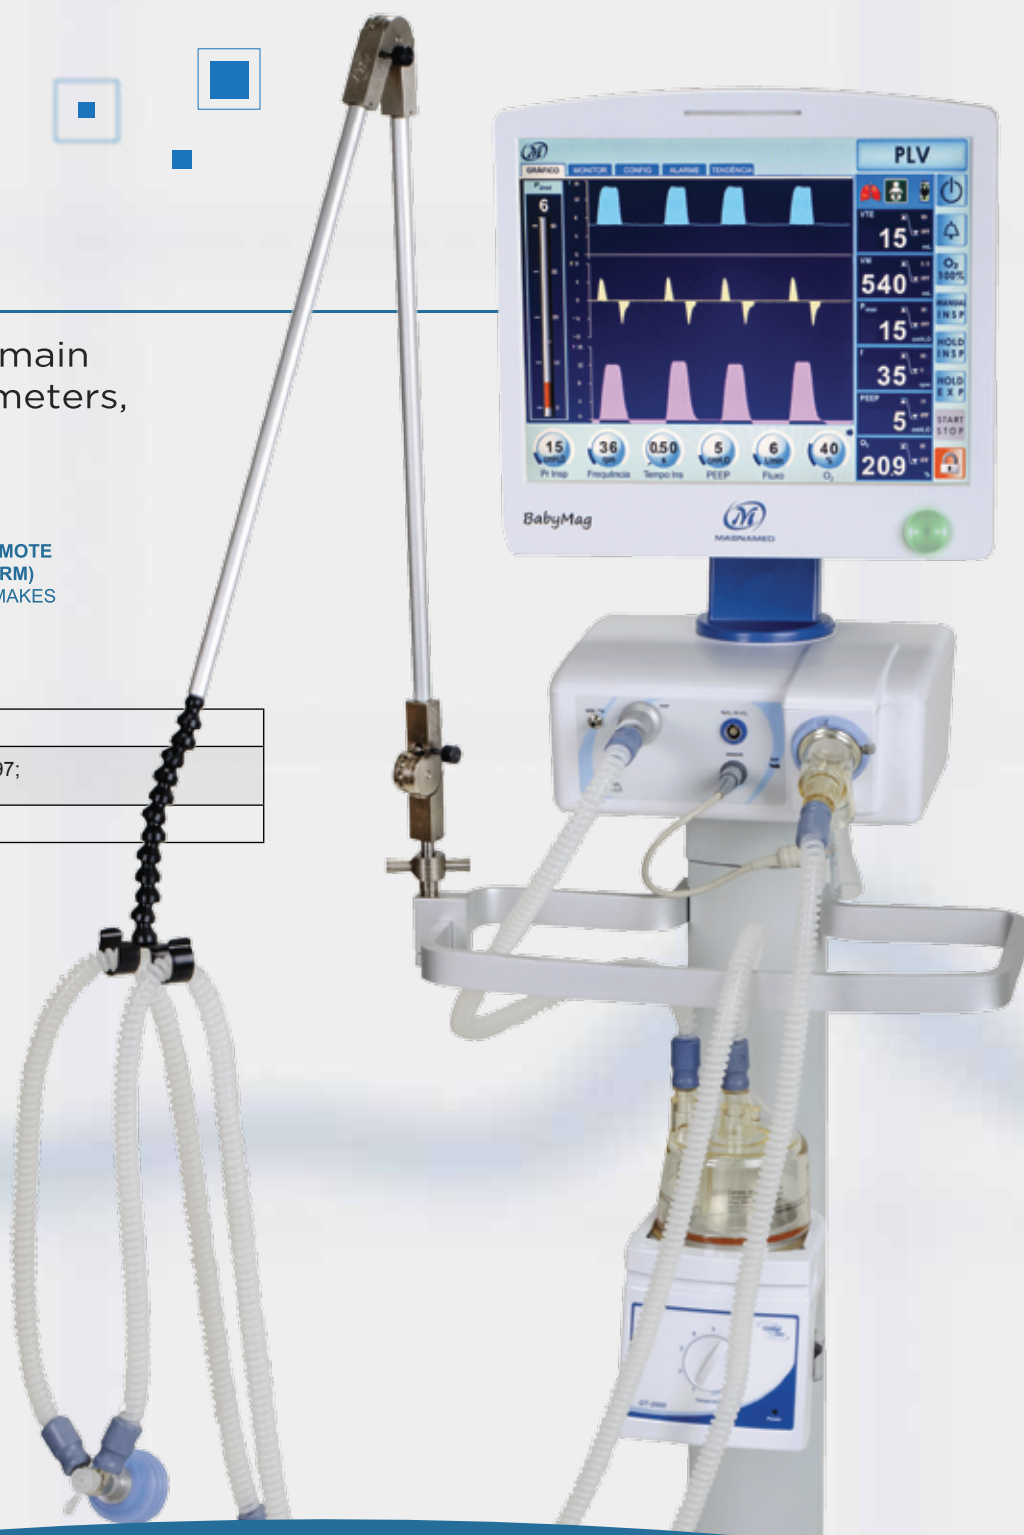

**Innovation within your reach**

[www.magnamed.com.br](http://www.magnamed.com.br)

Parque Industrial San José  
Estrada do Capuava, 2200  
Rua Santa Mônica, 801/831  
06715-865 - Cotia - SP - Brasil  
Tel.: (55 11) 4614-1495

Rua São Paulino, 221 - 04019-040  
São Paulo - SP - Brasil  
Tel.: (55 11) 5081-4115



Physical Characteristics
10.4 or 15 Inch LCD Color Touch Screen Display
Serial Interface RS 232
Keys: stand by; Hold Insp; Hold Exp; O2 100%; Manual Insp; Lock
Measurement of: pressure, flow, concentration of oxygen in the breathing circuit. Barometric and pipeline pressure measurement
Loudspeaker to indicate alarms and alerts
External Inlet 100-240VAC – 50/60Hz
On-Off button
Galvanic O2 Sensor (paramagnetic sensor is optional)
Distal Flow Sensor (Hot Wire)
Last Adjustments Start Up
Nebulizer Synchronized with Inspiration and Volume Compensation
Tracheal Gas Insufflation (TGI)
100% O2 to automatic system of aspiration
Automatic gas commutation in case of fault of oxygen or air compressed
Automatic Adjustment of Parameters According Patient Weight
Trend

Modalities
PLV (can be assisted); P-SIMV+PS; DUALPAP/APRV; CPAP/PS +NIV + backup

Adjustments Specifications Parameter
Respiratory Frequency: 0 to 180bpm
Rise Time: 0 to 2.0s
Inspiratory Pressure: 0 to 120cmH2O
ΔPS - Pressure Support: 0 to 120cmH2O
PEEP: 0 to 50cmH2O
Pressure Trigger: 0.0 to -20cmH2O
Flow Trigger: 0.0 to 30L/min
Cycling PS: 5 to 80%
FIO2: 21 to 100%
Inspiratory Time: 0.05 to 30s
CPAP: 1 to 50cmH2O
Pressure High: 1 to 60cmH2O
Pressure Low: 0 to 40cmH2O
Time High: 0.2 to 59.8s
Time Low: 0.2 to 59.8s
I:E Ratio : 1:599 to 10:1
Backup Ventilation: in all spontaneous modalities
Inspiratory Flow: 0 to 40L/min
Nebulizer: synchronized during inspiratory time
Tracheal Gas Insufflation (TGI) – deliver O2 100% during expiratory time

Ventilation Monitor
Curves Pressure x Time; Flow x Time; Volume x Time
Loops: Volume x Pressure; Flow x Volume
Bargraph of Instantaneous Pressure; Plateau Pressure, Peak Pressure
Visualization of until 5 curves in the same time
Peak Pressure, Mean Pressure and Plateau (numeric values)
PEEP and Intrinsic PEEP
Inspiratory and Expiratory Volume
Minute Volume and Spontaneous Volume
Compliance Static and Dynamic
Air way resistance
Inspiratory and Expiratory Time
I:E Ratio
Respiratory Frequency Total and Spontaneous

FIO2
------

Alarm System and Safety
Initial Auto Test
Leakage test
Automatic calibration
Anti-asphyxiation Valve
Safety Relief Valve 100hPa
Alarm Indicator Light (LED) with High Viewing
HIGH/LOW Pressure: OFF, 0 to 120cmH2O
HIGH/LOW PEEP: OFF , 0 to 80cmH2O
HIGH/LOW Volume: OFF, 0 to 3000ml
HIGH/LOW Respiratory Frequency : OFF, 0 to 200bpm
HIGH/LOW Minute Volume : OFF, 0 to 99L/min
FIO2: OFF; 21 to 100%
Apnea: OFF; 5 to 60s
Automatic Adjustment of Alarms: OFF; 10% , 20% , 30%
Low Battery
Air/O2 Low Pressure alarm
Disconnection/Obstruction of Respiratory Circuit
AC Input Fail

Internal Battery Li-Ion
Internal Li-Ion Battery 11.8Vdc; Intelligent Battery Charger
Internal Battery Autonomy: 180min

Connection to Oxygen Supply
Oxygen Inlet – DISS male 9/16" 18 threads
Oxygen Gas Pressure: 40 to 150PSI (280 to 1035 Kpa)
Hoses and Connections according ISO 5359:2000

Environmental and Physical Specifications
Dimension: 1335mm X 453mm X 542mm
Weight: 18Kg
Operation: Temperature: -10 to 50°C; Barometric Pressure: 600 to 1100cmH2O; Relative Humidity(no condensation): 15 to 95%

Standard Accessories
Trolley with wheels and front lock
Articulated Arm with Support
Flow Sensor (hot wire)
Silicone Respiratory Circuit Neonate
AC Power Cable
Flow sensor cable
Oxygen Hose DISS X2 – 3m
Air compressed Hose DISS X2 – 3m
Instruction Manual
Galvanic Oxygen Sensor (built in)

Optional Accessories
Paramagnetic Oxygen Sensor
Humidifier
Silicone Respiratory Circuit Pediatric
Silicone Respiratory Circuit Neonate